


# Transflex™ – Neutral Beamsplitter

## A Beam will be Highly Uniformly Splitted into a Reflected and a Transmitted Component

The splitting occurs uniformly on the entire mirror surface. Therefore the beam splitter can be installed in any location of a light path under an angle of 45° without interfering the optical imaging.

The Neutral Beamsplitters are composed of absorption free dielectric coating.

All Neutral Beamsplitters are available with a broadband antireflection coating on the rear side, on request.

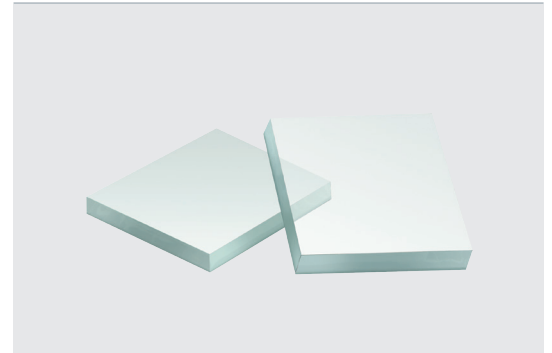


## Benefits

- Absorption-free
- Excellent environmental resistance
- Highly scratch-proof
- Neutral over the visible wavelength range

## Applications

- Projection equipment
- Light barriers
- Optical sensors

## Transflex™ working principle

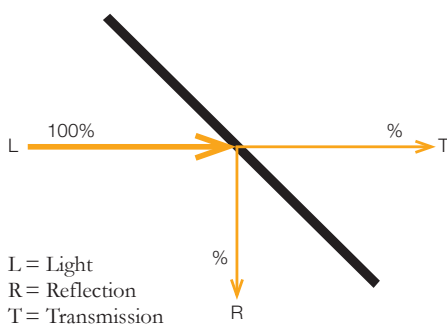

## Technical Data

The Neutral Beamsplitters are identified by their maximum spectral reflectivity at 550 nm  $\pm$  5%.

### Bandwidth:

450 nm–650 nm for glass

Other wavelengths are available on request.

### Standard glass

Corning Eagle XG

### Dimension

160 · 110 + 0, –0.5mm · 1.1  $\pm$  0.1 mm

Customized dimensions are also available.

Reflection (R) in %	Transmission (T) in %
10	90
15	85
20	80
25	75
33	67
40	60
45	55
50	50
55	45
66	34
75	25

### Environmental test according to MIL-C-675A

para. 4.6.8	salt solution, 24 h in 4.5% NaCl
para. 4.6.9	humidity, 24 h 49 °C at >95% r. H.
para. 4.6.10	salt fog, 24 h in 4.5% NaCl
para. 4.6.11	hardness, cheesecloth 50 strokes

Optics Balzers AG  
Neugrüt 35  
LI-9496 Balzers

Liechtenstein  
T +423 388 9200  
F +423 388 9390  
info.mbo@materion.com  
www.materion.com/balzersoptics

MBO 018 PE (2110-1)

1/1

Subject to technical change without notice