



Polarizing Beamsplitter for Wearable Devices

Miniature PBS with high light throughput

Materion Balzers Optics understands the tight budget of lumens, weight and size, when it comes to optical systems for wearable devices. Therefore, we have developed technologies to miniaturize the Polarizing Beamsplitter (PBS) without compromising its excellent light throughput characteristics. Chamfer-free manufacturing and our edge-to-edge coating procedure reduce the non-functional area to zero. And this improved utilization of substrate surface enables smaller component design. As option, patterned or uniform black chrome coating may be added to eliminate unwanted straylight.



Benefits

- Small size and weight
- High lumens throughput
- Tight surface form and angular tolerances
- Minimum dead area
- Flexibility in substrate material, shape and size
- High volume fabrication

Applications

- Augmented reality
- Wearable devices
- Near-Eye displays
- Pico projectors
- Laser projector
- Gesture recognition
- Solid state lighting

Technical Data

Dimensions

From 2 mm to 15 mm cubic or cuboid

Tolerances ± 0.005 mm

Angular tolerances $\pm 3'$

Bond line thickness < 0.01 mm

Flatness

< 0.5 fringes per 5 mm

Defects

Scratch/Dig 40/20 (MIL)

Edge chips < 0.05 mm

Glass Index range

from 1.50 to 1.85

Spectral performance for a broad spectrum

T_p (avg) $> 90\%$ VIS

R_s (avg) $> 95\%$ VIS

Contrast $> 300:1$

AOI = $45^\circ \pm 10^\circ$ (in glass)

Spectral performance for a narrow spectrum

(40 nm)

T_p (avg) $> 95\%$

R_s (avg) $> 99\%$

AOI = $45^\circ \pm 20^\circ$ (in glass)

Other possible features

OD4 Black chrome coating, patterned or uniform

Index matching layer on optical surfaces

PBS coating for NIR wavelengths

Assembly of wave-plates

Optics Balzers AG
Neugrüt 35
LI-9496 Balzers

Liechtenstein
T +423 388 9200
F +423 388 9390
info.mbo@materion.com
www.materionbalzersoptics.com

MBO 057 PE (2206-1)

1/2


Subject to technical change without notice



MATERION

// BALZERS OPTICS

PBS application in a LCOS projection system for near-eye displays

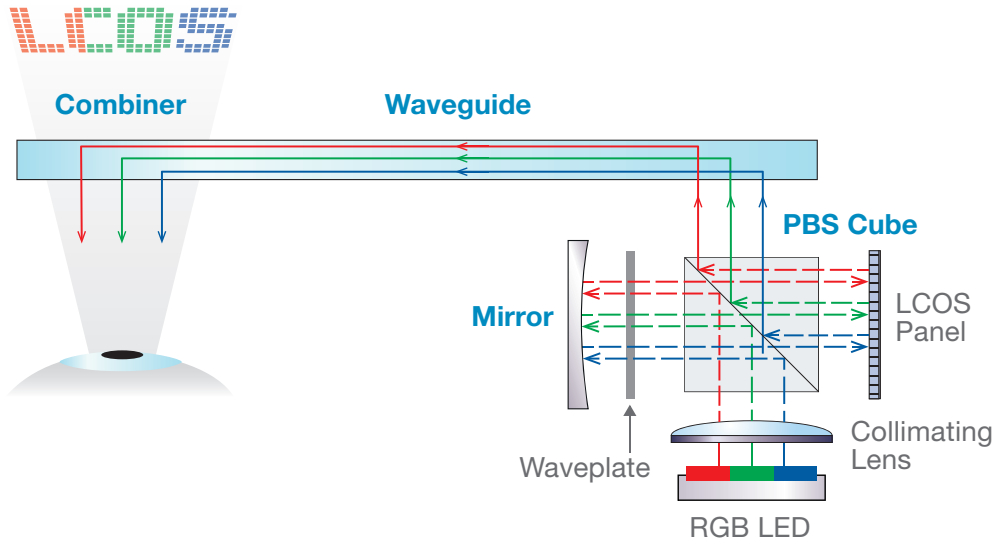

Optics Balzers AG
Neugrüt 35
LI-9496 Balzers

Liechtenstein
T +423 388 9200
F +423 388 9390
info.mbo@materion.com
www.materionbalzersoptics.com