




# Dichroic Beamsplitters

## Low-loss Dichroic Beamsplitters for the UV to NIR Range

Materion Balzers Optics dichroic beamsplitters separate the incoming light in a highly reflected and transmitted part. The transition zone can be reduced to approx. 3% of the transition wavelength for random polarized light. The all-dielectric interference filters are deposited by plasma-assisted processes and show extreme environmental stability. Filter dimension, spectral characteristic and angle of incidence can be customized.

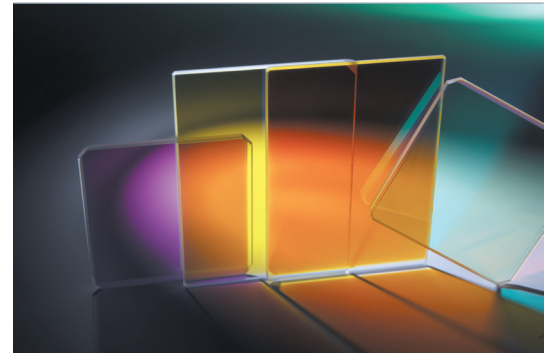

### Benefits

- Sharp separation between reflected and transmitted wavelength range
- > 90 % transmittance / reflectance
- Long-term shift-free spectral performance
- High environmental stability
- Wide flexibility in filter size

### Applications

- Fluorescence detection
- Coupling of light sources
- Raman spectroscopy
- Ophthalmologic surgery

### Technical Data

**Wavelength range**

300 – 2000 nm

**Reflectance**

> 90 – 95 %

**Transmittance**

> 90 – 95 %, depending on requirements

**Angle of incidence**

Standard 45°, different AOI on request

**Substrate material**

Fused silica, BK7 or float glass

**Dimensions**

Standard size Ø 25 x 3 mm or 36 x 26 x 2 mm, other dimensions on request

**Parallelism**

< 3 arcmin


**Surface defects**

5 / 3 x 0.1

**Environmental stability**

Temperature -40 °C ... +150 °C

Humidity up to 99 %

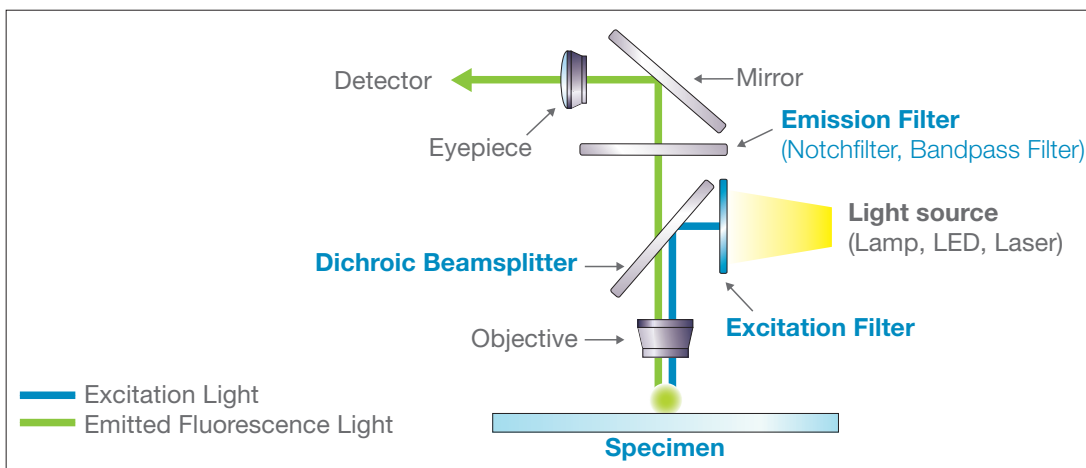

Optics Balzers Jena GmbH  
Otto-Eppenstein-Strasse 2  
07745 Jena

Deutschland  
T +49 3641 3529 30  
F +49 3641 3529 35  
info.mbo@materion.com  
www.materionbalzersoptics.com

### Beamsplitters for VIS Range, AOI 45°

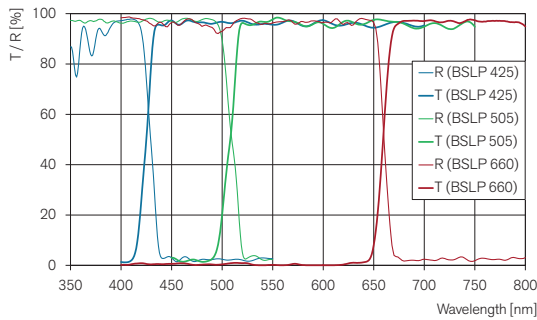


Fig. 1: Measured spectral transmittance and reflectance of unpolarized light at AOI = 45° for VIS range beamsplitters.

### Beamsplitters for NIR Range, AOI 45°

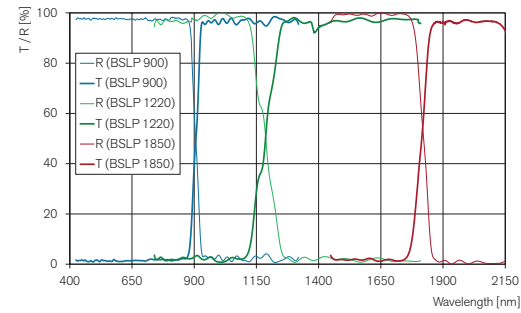


Fig. 2: Measured spectral transmittance and reflectance of unpolarized light at AOI = 45° for NIR range beamsplitters.

### Beamsplitters for UV Range, AOI 45°

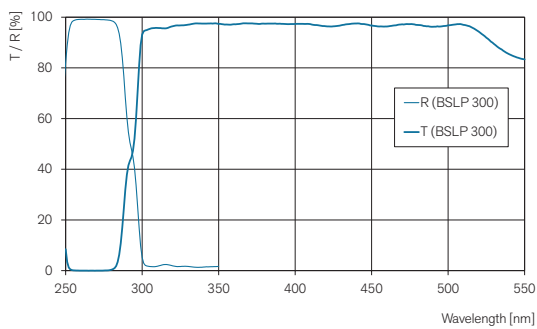


Fig. 3: Measured spectral transmittance and reflectance of unpolarized light at AOI = 45° for UV beamsplitter.

### Steep Edge Beamsplitters, AOI 45°

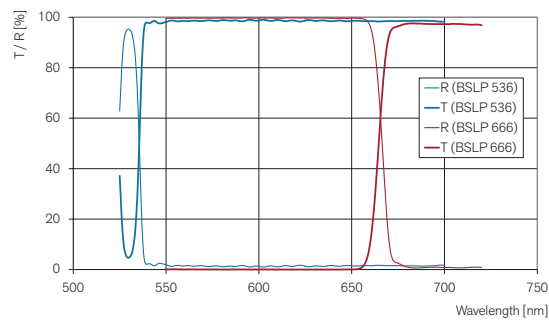


Fig. 4: Measured spectral transmittance and reflectance of unpolarized light at AOI = 45° for steep edge beamsplitters.