




# UV-Guard™ XB

## Extreme UV-Blocking Filters

Materion Balzers Optics UV-Guard™ XB filters are high performance dichroic filters with extremely high blocking for ultraviolet radiation and optional IR blocking characteristics. The outstanding UV blocking is achieved with a combination of tailored dichroic coatings produced with Materion Balzers Optics' proprietary sputter deposition technology. Standard borosilicate glass substrates are used for UV-Guard™ XB filters. The UV blocking levels of UV-Guard™ XB filters are similar to UV-absorption glass, without high substrate cost and temperature dependent spectral performance. UV-Guard™ XB dichroic filter coatings can be applied on flat shaped customer specific substrates including flyeye lens.

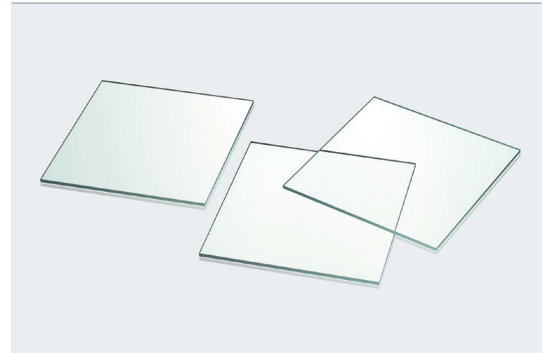

### Benefits

- Extremely high UV-rejection (typ better than 10<sup>-5</sup>), similar to UV-absorption glass
- Superior optical stability at higher operating temperatures (spectral stability typ. < 0.7 nm/100 °C)
- Very narrow cut-on/cut-off edge tolerances (< ± 1%)
- Very steep cut-on slopes available
- High transmission for visible light
- Excellent spectral uniformity and stability under varying environmental conditions (spectral shift typ. < 0.5 nm)
- Standard low cost borosilicate substrates (other glass substrates upon customer request)
- High volume production capabilities
- Engineering support for custom designed UV-Guard™ XB filters

- Secondary UV filter for blue channel
- Other applications which involve UV-sensitive optical components in instrumentation and sensors.

### Technical Data

Typical performance\* (AOI = 0°)

	UV-Filter type	UV/IR-Filter type
T = 50%	430 ± 4 nm	430 ± 4 nm 680 ± 6 nm
T20%–T80%	< 6 nm	< 8 nm (UV) < 16 nm (IR)
300–380 nm	T < 0.001%	T < 0.001%
380–420 nm	dlogT/dλ ~0.1 nm <sup>-1</sup>	dlogT/dλ ~0.15 nm <sup>-1</sup>
440–660 nm	T-avg > 96%	T-avg > 95%
750–900 nm	n.a.	T-avg < 2%

\* other performance upon customer request

### Applications

UV Guard™ XB filters are specially designed for applications which require extraordinary blocking of UV radiation. Typical applications are in tLCD and LCOS based projection display systems:

- Primary UVIR filter at UHP lamp

**Heat resistant** up to 400 °C


**Surface quality** 80/50 (typical)

**Environmental stability**  
according to MIL-M-13508C

**Substrate material**  
heat resistant Borosilicate glass


**UV-Guard™ XB types available**

### UV-IR filter application of UV-Guard™ XB

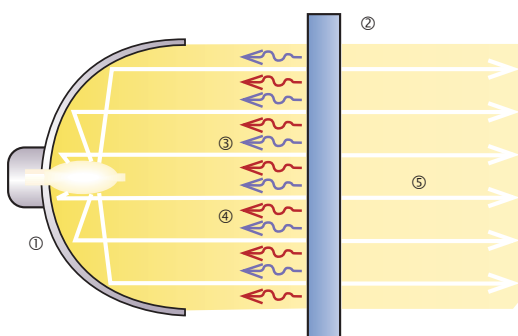

- Lamp with reflector
- UV-Guard™ XB filter
- Blocked UV radiation
- Blocked IR radiation
- Transmitted visible light

### UV filter application of UV-Guard™ XB




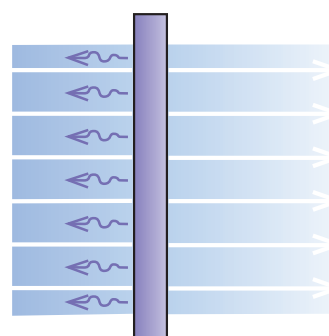


Optics Balzers AG  
Neugrüt 35  
LI-9496 Balzers

Liechtenstein  
T +423 388 9200  
F +423 388 9390  
info.mbo@materion.com  
www.materion.com/balzersoptics

MBO 037 PE (2206-1)

Typical spectral curves of UV-Guard™ XB Filters together with emission spectrum of typical UHP lamp

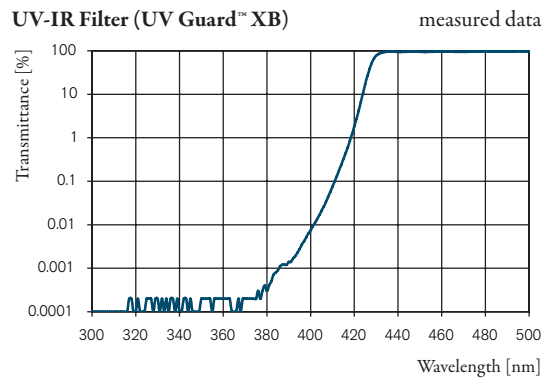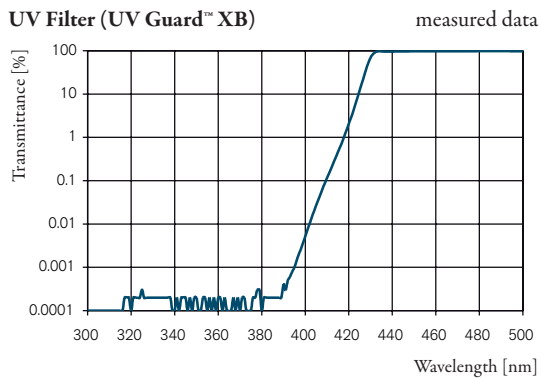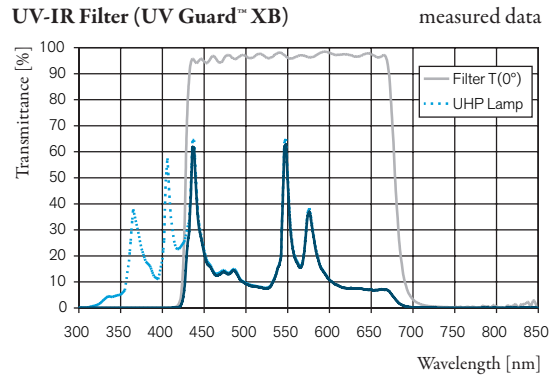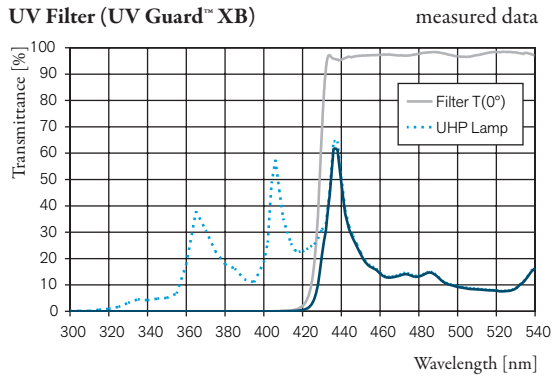

UV-blocking filter for blue channel in tLCD

Primary UVIR filter with extreme UV-blocking for tLCD/  
LCOS

UV blocking filter with broadband RGB transmission

Optics Balzers AG  
Neugrüt 35  
LI-9496 Balzers

Liechtenstein  
T +423 388 9200  
F +423 388 9390  
info.mbo@materion.com  
www.materion.com/balzersoptics

MBO 037 PE (2206-1)

2/2

Subject to technical change without notice