


Narrow Bandpass Filters for Gesture Recognition Systems

NIR Bandpass Filter with Low Angle Dependency and High Performance Blocking

Gesture recognition and TOF systems like 3D imaging applications require best transmission performance in the range of the illumination wavelength (Laser or LED source) for a wide field of view. Outside the bandpass an extraordinary blocking is required to suppress the ambient illumination for a better contrast. The filters can be provided in various sizes and if required with B-Stage Epoxy or solderable coating frames for optional sealing.

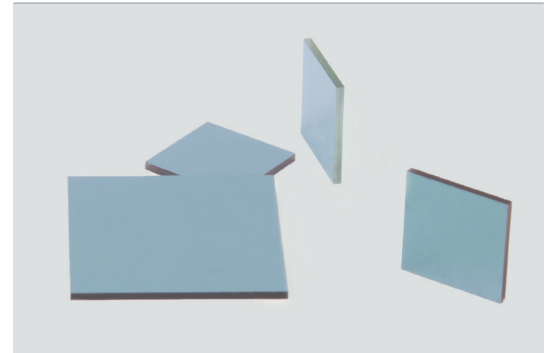


Benefits

- Design experience for customized solutions
- Fast sampling possible
- High volume production
- Customized filter sizes
- Optional sealing technologies available

Applications

- Gesture recognition system
- 3D imaging applications
- Multi purpose cameras for the automotive market
- Distance measurement systems

Schematic of NIR Bandpass Filters for TOF Camera

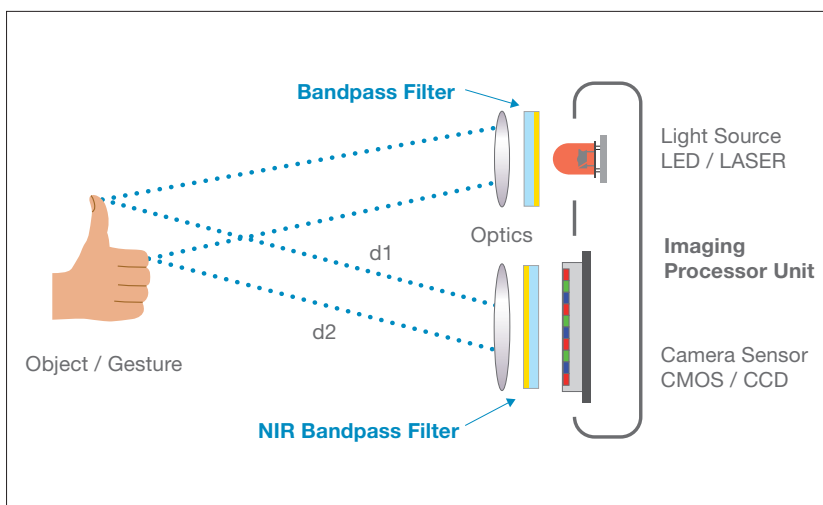

Technical Data

Transmittance in the bandpass

$T_{avg} > 94\%$ in the bandpass NIR

Blocking in the cut off bands

OD > 4 avg (UV and VIS)

OD > 3 avg (up to 1.2 μm)

OD > 2 abs

Slope

$T(90\%) - T(10\%) < 10 \text{ nm}$

CWL shift as a function of AOI

< 12 nm up to 30° AOI

Max substrate size

200 mm round

Design adjustments

According to application and customer requirements possible

Optics Balzers AG
Neugrüt 35
LI-9496 Balzers

Liechtenstein
T +423 388 9200
F +423 388 9390
info.mbo@materion.com
www.materion.com/balzsoptics

MBO 056 PE (2110-1)

1/2


Subject to technical change without notice



MATERION

// BALZERS OPTICS

NIR Bandpass Filter with back side AR

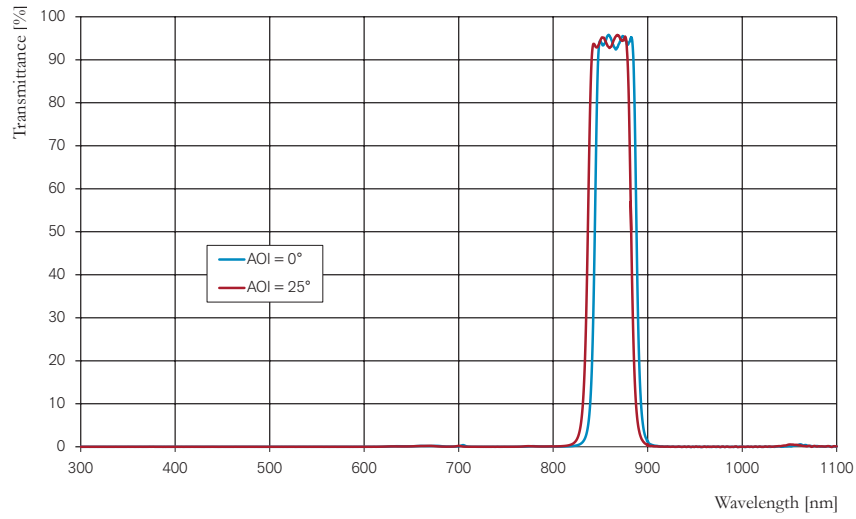

Optics Balzers AG
Neugrüt 35
LI-9496 Balzers

Liechtenstein
T +423 388 9200
F +423 388 9390
info.mbo@materion.com
www.materion.com/balzersoptics

MBO 056 PE (2110-1)

2/2

Subject to technical change without notice